



Adhesive Tapes

AUTOMOTIVE



Sicad Group

The adhesive tape experience



english



the adhesive tape experience

Sicad Group with his brand Eurocel® has been a pioneer in the development of stationery tapes in Europe. Since 1972, starting from office and stationery supply, Sicad has developed his Adhesive Tapes Experience becoming today one of the world leading company in the manufacturing of a wide range of adhesive tapes products. We deliver our global customer base from our factories in France, South Africa, Croatia, Brazil and from the HQ in Italy.

Sicad know-how covers all existing coating technologies, our mission is to share with customers our Adhesive Tape Experience.



Sicad S.p.A. - Uboldo (VA), Italy



BST S.p.A.
Caserta, Italy



Sipro D.o.o.
Umago, Croatia




Sicad France SAS
Lomme, France



Sicad do Brasil LTDA
Capivari, Brazil



Sicad S.A. PTY
Johannesburg, South Africa

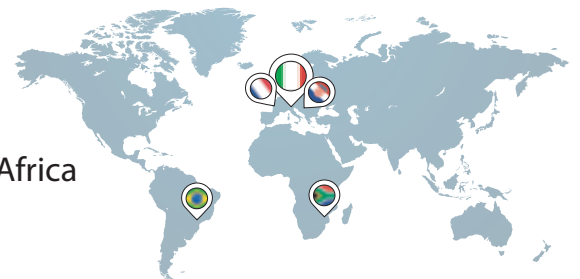



index

car refinishing & repairing

pag. 4	MSK 60
	MSK 6063
	MSK 6064
	MSK 6260
	MSK 6262
	MSK 6264
	MSK 6265
	MSK 6267
	MSK 6268
	MSK 6280
	MSK 6282
	MSK 80
	MSK 64
	MSK 67
	MSK 6755
	MSK 93
	MSK 94
	MSK 95
	MSK 96
	MSK 98
	MSK 99
	MSK 100
	MSK 121
	MSK 128
	MSK PE 90

special industrial applications

pag. 10	MSK 1110
---------	----------

multipurpose & maintenance

pag. 11	770 PROFIL
	MSK 1105
	201 TPL
	204 TPL
	211 TPL
	ISOTAPE

decoration & building

pag. 13	MSK 97
	MASKOPRI FILM
	MASKOPRI CARTA

temporary protection

pag. 14	SF 7200/ SF 7210/ SF 7211 TIPTAPE
	SF 7220/ SF 7221/ SF 7222 TIPTAPE

palletizing

pag. 15	PP 500
	PP 800
	LEGAROLL

fixing, mounting & fastening

pag. 16	700 RDA
	710 TNT
	756 TRANSFER

flooring & carpet

pag. 17	721 PPDA
---------	----------

thermal exchange & white industry

pag. 17	9005
	901
	903
	9431 BD



symbols caption



thickness



multipurpose



adhesion



easy tear



tensile strength



protection



elongation to break



waterproof



temperature resistance



weather resistant



conformability



removable



certified



IR process suitable



UV resistant



easy peeling
























automotive

car refinishing & repairing







Masking tapes are designed to make the painting job easy. They will remove in one piece, without tearing and leaving adhesive residues. Tape must be applied on a clean, dry and oil free substrate. Application times are indicative and will depend on working conditions.



MSK 60 			Multipurpose masking tape For all masking jobs in the building and industrial sector, as well as for car body repair jobs. Temperature resistance up to 80°C (30min). Recommended to remove within 48 hours.					
								
BACKING saturated paper	ADHESIVE natural rubber	COLOUR white	 0.125mm	 4.3 N/25mm	 85 N/25mm	 7.5 %	 80°C (30 min)	
MSK 6063 			Car painting masking tape High performance masking tape for car painting and repairing with excellent adhesion to own backing, also suitable for boat painting. Temperature resistance up to 80°C (30 min).					
								
BACKING saturated paper	ADHESIVE natural rubber	COLOUR white	 0.125mm	 6.25 N/25mm	 85 N/25mm	 8.5 %	 80°C (30 min)	
MSK 6064 			Car painting masking tape High performance masking tape for car painting and repairing with excellent adhesion to own backing, also suitable for boat painting. Easy removal without adhesive residue. Temperature resistance up to 80° C (30 min).					
								
BACKING saturated paper	ADHESIVE natural rubber	COLOUR yellow	 0.125mm	 6.25 N/25mm	 85 N/25mm	 8.5 %	 80°C (30 min)	

MSK 6260			Masking tape for body shop Masking tape suitable for car repair applications when temperature does not exceed 80°C. Compatible with most common paints and lacquers. Removable without breaking. Temperature resistance up to 80°C (60 min).				
							
BACKING saturated paper	ADHESIVE natural rubber	COLOUR yellow	0.125mm	4.3 N/25mm	85 N/25mm	7.5 %	80°C (60 min)








MSK 6262			High visibility pink masking tape for car repair Masking tape for general use and suitable for car repair applications when temperature does not exceed 80°C. Well conformable to most shaped surfaces. Special colour allow high visibility for easy removal. Temperature resistance up to 80°C (30 min).				
							
BACKING saturated paper	ADHESIVE natural rubber	COLOUR pink	0.125mm	4.3 N/25mm	85 N/25mm	8 %	80°C (30 min)

MSK 6264			High visibility turquoise masking tape for car repair Masking tape for general use and suitable for car repair applications when temperature does not exceed 80°C. Well conformable to most shaped surfaces. Special colour allow high visibility for easy removal. Temperature resistance up to 80° C (30 min).				
							
BACKING saturated paper	ADHESIVE natural rubber	COLOUR turquoise	0.125mm	4.3 N/25mm	85 N/25mm	8 %	80°C (30 min)






MSK 6265			High visibility blue masking tape for car repair Masking tape for general use and suitable for car repair applications when temperature does not exceed 80°C. Well conformable to most shaped surfaces. Temperature resistance up to 80° C (30 min).				
							
BACKING saturated paper	ADHESIVE natural rubber	COLOUR blue	0.125mm	4.3 N/25mm	85 N/25mm	8 %	80°C (30 min.)



automotive

MSK 6267			High visibility orange masking tape for car repair Masking tape for general use and suitable for car repair applications when temperature does not exceed 80°C. Well conformable to most shaped surfaces. Temperature resistance up to 80° C (30 min).				
							
BACKING saturated paper	ADHESIVE natural rubber	COLOUR orange	0.125mm	4.3 N/25mm	85 N/25mm	8 %	80°C (30 min)

MSK 6268			High visibility green masking tape for car repair Masking tape for general use and suitable for car repair applications when temperature does not exceed 80°C. Well conformable to most shaped surfaces. Temperature resistance up to 80° C (30 min).				
							
BACKING saturated paper	ADHESIVE natural rubber	COLOUR green	0.125mm	4.3 N/25mm	85 N/25mm	8 %	80°C (30 min)








MSK 6280			Car repair and body shops masking tape Resists to solvents and diluents. Compatible with all current solvent and water based paints and varnishes. Resistance up to 100°C (30 min).				
							
SUPPORTO saturated paper	ADESIVO natural rubber	COLORE white	0.130mm	4.5 N/25mm	85 N/25mm	8.5 %	100°C (30 min.)

MSK 6282			Car repair and body shops masking tape Masking tape for automotive body shops. Suitable for high performance application for use in automotive repair workshops. Well adaptable to most surfaces and compatible with most common paints and lacquers. Temperature resistance up to 100°C (30 min).				
							
BACKING saturated paper	ADHESIVE natural rubber	COLOUR brown	0.130mm	4.5 N/25mm	85 N/25mm	8.5 %	100°C (30 min)

MSK 80				Professional body shops masking tape High performance tape in overlapping the tape with masking paper. Resistance to infra red lamps. The yellow colour allows shading, creating a clear contrast with most frequent colours. Resistance up to 110°C (30 min).					
									
BACKING saturated paper	ADHESIVE natural rubber	COLOUR yellow	 0.135mm	 4.5 N/25mm	 85 N/25mm	 9 %	 110°C (30 min)		

MSK 64				High adhesion masking tape Waterproof masking tape used for car repair applications, with a more aggressive adhesive when higher adhesion is required. Resistance to temperatures up to 80°C (30 min).					
									
BACKING saturated paper	ADHESIVE natural rubber	COLOUR beige	 0.135mm	 6 N/25mm	 110 N/25mm	 9 %	 80°C (30 min)		

MSK 67				Waterproof masking tape Waterproof masking tape used for car repair applications as well as for wall-painting on building and construction sites and for industrial use. Temperature resistance up to 80°C (30 min).					
									
BACKING saturated paper	ADHESIVE natural rubber	COLOUR yellow	 0.125mm	 4.8 N/25mm	 90 N/25mm	 8 %	 80°C (30 min)		

MSK 6755				Waterproof UV resistant masking tape Waterproof masking tape used for car repair applications as well as for wall-painting. 3 days UV protected. Temperature resistance up to 80°C (30 min).					
									
BACKING saturated paper	ADHESIVE natural rubber	COLOUR yellow	 0.125mm	 4.8 N/25mm	 90 N/25mm	 8 %	 80°C (30 min)		



automotive

MSK 93				Waterproof mandarine masking tape			
		<p>Waterproof masking tape widely used for car repair applications as well as for wall-painting on building and construction sites and industrial use. Easy removal without adhesive residue. Good adhesion on uneven surfaces also. Temperature resistance up to 90°C (30 min).</p>					
BACKING saturated paper	ADHESIVE natural rubber	COLOUR mandarine	 0.130mm	 4.8 N/25mm	 90 N/25mm	 8 %	 90°C (30 min)

MSK 94				Waterproof turquoise masking tape			
		<p>Waterproof masking tape widely used for car repair applications as well as for wall-painting on building and construction sites and industrial use. Easy removal without adhesive residue. Good adhesion on uneven surfaces also. Temperature resistance up to 90°C (30 min).</p>					
BACKING saturated paper	ADHESIVE natural rubber	COLOUR turquoise	 0.130mm	 4.8 N/25mm	 90 N/25mm	 8 %	 90°C (30 min)









MSK 95				Waterproof blue masking tape			
		<p>Waterproof masking tape widely used for car repair applications as well as for wall-painting on building and construction sites and industrial use. Easy removal without adhesive residue. Good adhesion on uneven surfaces also. Temperature resistance up to 90°C (30 min).</p>					
BACKING saturated paper	ADHESIVE natural rubber	COLOUR blue	 0.130mm	 4.8 N/25mm	 90 N/25mm	 8 %	 90°C (30 min)

MSK 96				Waterproof red masking tape			
		<p>Waterproof masking tape widely used for car repair applications as well as for wall-painting on building and construction sites and industrial use. Well conformable to most shaped surfaces. Compatible with most common paints and lacquers and highly resistant to moisture and water. Temperature resistance up to 90°C (30 min).</p>					
BACKING saturated paper	ADHESIVE natural rubber	COLOUR red	 0.130mm	 4.8 N/25mm	 90 N/25mm	 8 %	 90°C (30 min)

MSK 98			Waterproof green masking tape Waterproof masking tape widely used for car repair applications as well as for wall-painting on building and construction sites and industrial use. Good adhesion on uneven surfaces also. Temperature resistance up to 90°C (30 min).				
 			 0.130mm	 4.8 N/25mm	 90 N/25mm	 8 %	 90°C (30 min)
BACKING saturated paper	ADHESIVE natural rubber	COLOUR green					

MSK 99			Waterproof yellow masking tape Waterproof masking tape widely used for car repair applications as well as for wall-painting on building and construction sites and industrial use. Easy removal without adhesive residue. Good adhesion on uneven surfaces also. Temperature resistance up to 90°C (30 min).				
 			 0.130mm	 4.8 N/25mm	 90 N/25mm	 8 %	 90°C (30 min)
BACKING saturated paper	ADHESIVE natural rubber	COLOUR lemon yellow					


MSK 100			Waterproof, high temperature masking tape Designed for demanding applications when high precision is required. Recommended for drying cycles of 100°C. Resistance to infra red lamps. Resistance up to 120°C (30 min).				
  			 0.140mm	 5 N/25mm	 100 N/25mm	 8 %	 120°C (30 min)
BACKING saturated paper	ADHESIVE natural rubber	COLOUR brown					

MSK 121			Waterproof, high temperature masking tape Designed for demanding applications which require high precision, recommended for drying cycles of 100°C. Resistance to IR lamps. The special yellow colour creates a clear contrast marking the edge of the tape. Resistance up to 120°C (30 min).				
  			 0.145mm	 4.5 N/25mm	 110 N/25mm	 8 %	 120°C (30 min)
BACKING saturated paper	ADHESIVE natural rubber	COLOUR lemon yellow					



automotive

MSK 128



Automotive high grade waterproof masking tape
High performance waterproof masking tape, especially recommended for shaped surfaces. Compatible with most common solvent and water based paints, specific heat resistant for oven drying cycles. Temperature resistance up to 100°C (60 min)/ 120°C (short period).

	BACKING saturated paper	ADHESIVE natural rubber	COLOUR green	 0.190mm	 7 N/25mm	 105 N/25mm	 14 %	 120°C
--	-----------------------------------	-----------------------------------	------------------------	-------------	--------------	----------------	----------	-----------

MSK PE 90



High conformability
Polyethylene masking tape specially developed for the automotive sector, for bumpers and areas where a high conformability is required to mask difficult shapes. Resistance up to 90°C (1 hour).

	BACKING LPDE 100µm	ADHESIVE natural rubber	COLOUR white	 0.120mm	 3.5 N/25mm	 60 N/25mm	 400 %	 90°C (60 min)
--	------------------------------	-----------------------------------	------------------------	-------------	----------------	---------------	-----------	-------------------

special industrial applications

Sand-blasting, powder coating, mechanical resistance. Tapes designed and manufactured for use in specific processes and purposes.



MSK 1110



High mechanical resistance paper tape
High resistance flatback paper tape for sandblasting applications. Can also be used in the paper industry as a paper roll closure tape.

	BACKING saturated paper	ADHESIVE natural rubber	COLOUR white	 0.150mm	 6 N/25mm	 185 N/25mm	 4 %	 80°C (60 min)
--	-----------------------------------	-----------------------------------	------------------------	-------------	--------------	----------------	---------	-------------------

multipurpose & maintenance








Versatility is the key to products that are highly-performing in very different fields of application.














770 PROFIL  			Long term foam Black foam to mount plates, emblems and profiles in the automotive sector. High adhesion. Excellent resistance to UV, weather conditions and ageing. High elongation and conformability. Easy to tear by hand.				
BACKING LDPE foam	ADHESIVE acrylic solvent based	COLOUR black (green liner)	 0.850mm	 est: 14 N/25mm int: 14 N/25mm	 24 N/25mm	 220 %	 90°C
MSK 1105  			Heavy duty paper masking tape High grade general purpose crepe masking tape, suitable for most paint masking applications. With a strong paper backing for resistance even in heavy use such as building, construction and industrial applications. Recommended to remove within 48 hours.				
BACKING saturated paper	ADHESIVE natural rubber	COLOUR beige	 0.153mm	 7 N/25mm	 110 N/25mm	 10 %	 80°C (30 min)
201 TPL  			Multipurpose repairing All purpose repair tape for cables, tubes and panels, heavy packaging, urgent repairing and fixing jobs on plastics, wood, fabrics, tents, etc.				
BACKING laminated cloth	ADHESIVE synthetic rubber	COLOUR various	 0.185mm	 16 N/25mm	 100 N/25mm	 15 %	 60°C



automotive

204 TPL 			Thinner version multi purpose repairing Thinner version of 201 TPL, all purpose repair tape for cables, tubes and panels, urgent repairing and fixing jobs on fabrics, tents, etc.				
							
BACKING laminated cloth	ADHESIVE synthetic rubber	COLOUR silver	 0.160mm	 12 N/25mm	 95 N/25mm	 10 %	 60°C










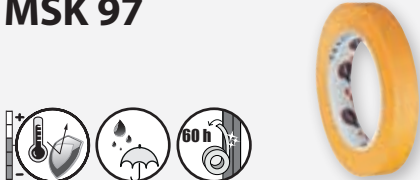


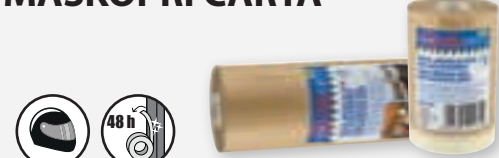





211 TPL 			Multipurpose single-sided tape Structured with a special PET cloth backing made by coextrusion. Perfect for use in the building field to mask uneven surfaces, also outdoors (max 10 days). It can be used in body shop and as a masking tape during heavy sand dusting of critical areas. Very popular in DIY, this is the universal tape for all "emergency" use.				
							
BACKING laminated cloth	ADHESIVE natural rubber	COLOUR silver	 0.150mm	 7 N/25mm	 85 N/25mm	 15 %	 n.a.

ISOTAPE 			Electrical tape Single sided soft PVC tape for the electrical insulation, cables and wires. Available in various colours for easy identification. Conform to the CEI EN 60454-3-1 IEC 60454-3-1-5/F-PVCP/90.				
							
BACKING PVC	ADHESIVE natural rubber	COLOUR various	 0.130mm	 5 N/25mm	 70 N/25mm	 230 %	 90°C

decoration & building

Masking tapes are designed to make painting, varnishing and finishing easier; they are easy to apply also on particularly elaborate shapes and can be quickly removed leaving no adhesive residues. Given the wide range of masking tapes, you can choose the tape that best suits your purpose.



MSK 97 			Waterproof orange masking tape Masking tape resistant to water, recommended for jobs in humid and wet conditions. Recommended to remove within 60 hours.				
BACKING saturated paper	ADHESIVE natural rubber	COLOUR orange	 0.130mm	 48 N/25mm	 90 N/25mm	 8 %	 90°C (30 min)
MASKOPRI FILM 			Wide surfaces Ready to use: a transparent HDPE film lined with a special masking tape. The film is electrostatically loaded to stick to whole surface. Recommended for big surfaces, like walls, pieces of furniture, doors etc. for professional, industrial and DIY applications. Resistance up to 80°C (30 min). Recommended to remove within 48 hours.				
BACKING various	ADHESIVE natural rubber	COLOUR not applicable	 0.125mm	 43 N/25mm	 85 N/25mm	 7.5 %	 80°C (30 min)
MASKOPRI CARTA 			Wide surfaces Ready to use: a paper film lined with a special masking tape. Recommended for big surfaces, like walls, furniture, doors etc. for professional, industrial and DIY applications. Resistance up to 80°C (30 min). Recommended to remove within 48 hours.				
BACKING various	ADHESIVE natural rubber	COLOUR not applicable	 0.136mm	 48 N/25mm	 100 N/25mm	 8 %	 80°C (30 min)



automotive

temporary protection

The protective tapes reduce damage to materials during manufacturing or transport. Our range of Tip Tape protective foams ensures a very high level of mechanical protection. Given the different combinations of thickness and adhesive strength, they are perfect for all surfaces.



SF 7200/ SF 7210/ SF 7211 TIP TAPE 			Standard protection foam Protection from dirt and dust, but also from accidental impacts. Easy to remove, no residues.				
BACKING laminated foam	ADHESIVE acrylic water based	COLOUR white	 0.800mm	 1 N/25mm(SF 7211) 3 N/25mm(SF 7210) 4.5 N/25mm(SF 7200)	 > 30 N/25mm	 < 200 %	 60°C
SF 7220/ SF 7221/ SF 7222 TIP TAPE 			Higher thickness versions Protection from dirt and dust, but also from accidental impacts. Easy to remove, no residues.				
BACKING laminated foam	ADHESIVE acrylic water based	COLOUR white	 1.600mm	 1 N/25mm(SF 7221) 3 N/25mm(SF 7220) 4.5 N/25mm(SF 7222)	 > 30 N/25mm	 < 200 %	 60°C

palletizing

Special carriers have been developed, thin but extremely resistant, ideal for palletising, heavy goods and also goods which must be moved with particular caution.



PP 500  		Standard strapping tape Mono-oriented pallet tape with medium resistance, recommended to bundle pallets and for light reinforcement. Good resistance to break.					
BACKING MOPP 50µm	ADHESIVE synthetic rubber	COLOUR various	 0.072mm	 15 N/25mm	 425 N/25mm	 35 %	 60°C
PP 800  		High resistance strapping tape Mono-oriented pallet tape with medium-high resistance, recommended to bundle pallets. High resistance to break. Maximum security.					
BACKING MOPP 75µm	ADHESIVE synthetic rubber	COLOUR various	 0.097mm	 15 N/25mm	 650 N/25mm	 35 %	 60°C
LEGAROLL  		Wrapping tape Non adhesive film with high elongation, to wrap and protect all types of material. Thanks to its special dispenser, it's easy to use in the professional, domestic and DIY areas.					
BACKING various	ADHESIVE non adhesive	COLOUR transparent	 0.020mm	 n.a.	 100 N/25mm	 450 %	 n.a.
























automotive

fixing, mounting & fastening

Double sided tapes are the easiest and quickest way of fixing things together: bond is immediate, seal invisible, handling easy and clean. Available with or without reel, as is the case of transfer tapes, the best solution for the kind of fitting required.



700 RDA  		Multipurpose fixing To fix photographs, samples, light objects and small items. Easy to use. High tack and adhesion both sides. Easy to tear by hand (according to roll format).					
BACKING BOPP	ADHESIVE synthetic rubber	COLOUR transparent (brown paper)	 0.098mm	 est: 20 N/25mm int: 30 N/25mm	 100 N/25mm	 140 %	 60°C
710 TNT  		Lamination and complex To fix together difficult substrates, like cardboard, metal, plastics and felt. Versatile. High tack and adhesion both sides. Very conformable. Easy to tear by hand.					
BACKING non woven	ADHESIVE synthetic rubber	COLOUR transparent (brown paper)	 0.100mm	 est: 27.5 N/25mm int: 25 N/25mm	 25 N/25mm	 5 %	 60°C
756 TRANSFER  		Multipurpose, versatile Film of adhesive without backing, general purpose, to fix various items in the industry, craft industry, at school and at home. Good adhesion on all substrates (cardboard, paper, leather, fabrics, plastics, wood). Good ageing resistance. Temperature resistance up to 130°C (short period).					
BACKING without backing	ADHESIVE acrylic solvent based	COLOUR transparent (brown paper)	 0.050mm	 9.5 N/25mm	 n.a.	 n.a.	 130°C

flooring & carpet

Covering a ruined and uneven floor, fitting a carpet or a rug has never been easier: simply choose the permanent or removable double sided tape that best suits your needs.



721 PPDA



Generic fixing, easy tear

Plastic film to lay carpets, fit for general fixing in the industry, like 720 PPDA. Recommended to fix samples and light items and felt. High tack and adhesion on both sides. High elongation and conformability. Particularily easy to use.

BACKING OPP	ADHESIVE synthetic rubber	COLOUR white (brown paper)	 0.115mm	 est: 20 N/25mm int: 25 N/25mm	 50 N/25mm	 600 %	 60°C
-----------------------	-------------------------------------	--------------------------------------	-------------	--------------------------------------	---------------	-----------	----------

thermal exchange & white industry

A number of highly technical and fully performing adhesive tapes, paramount during assembling lines to keep the various parts of the unit in position and fix heavy or bulky components during transportation. The aluminum tapes also ensure maximum performance during thermal exchange.



9005










Easy release liner








Designed to join insulation panels in the building industry, aluminium pipes in the air conditioning and ventilation sector. Easy release plastic film liner. Certified DIN 4102-B1. Temperature resistance up to 100°C (short period).








BACKING aluminium 25µm	ADHESIVE acrylic water based	COLOUR silver (white PE liner)	 0.053mm	 6.25 N/25mm	 38 N/25mm	 4 %	 100°C
-------------------------------------	--	--	-------------	-----------------	---------------	---------	-----------



automotive

901  		Minimum thickness - paper liner Designed to join insulation panels in the building industry, aluminium pipes in the air conditioning and ventilation sector. Good temperature resistance. Hand tearable. Certified DIN 4102-B1. Temperature resistance up to 100°C (short period).					
BACKING aluminium 30µm	ADHESIVE acrylic water based	COLOUR silver (white paper)	 0.058mm	 8.5 N/25mm	 50 N/25mm	 6 %	 100°C

903  		High thickness - paper liner Designed to join insulation panels in the building industry, aluminium pipes in the air conditioning and ventilation sector. Good adhesion. Excellent resistance to ageing, high temperature and UV rays. Certified DIN 4102-B1. Temperature resistance up to 100°C (short period).					
BACKING aluminium 50µm	ADHESIVE acrylic water based	COLOUR silver (white paper)	 0.077mm	 9.5 N/25mm	 85 N/25mm	 7 %	 100°C

9431 BD  		Reinforced Reinforced aluminium tape to join insulation and reflective panels in the building industry, aluminium pipes in the air conditioning and ventilation sector. Good adhesion. Excellent resistance to ageing, high temperature and UV rays. High resistance to break. Temperature resistance up to 90°C (short period).					
BACKING reinforced backing	ADHESIVE acrylic solvent based	COLOUR silver (white paper)	 0.135mm	 9 N/25mm	 175 N/25mm	 5 %	 90°C

www.eurocel.it



Sicad S.p.A.
Via Caduti della Liberazione, 57
21040 Uboldo, (VA) - Italia

**Azienda con
Sistema di Gestione Qualità
certificato
UNI EN ISO 9001 :2008**

The adhesive tape experience